



## Main Features

- ♦ Seamless integration of field devices, web, database and cloud services
- ♦ Modbus TCP/RTU, OPC UA support in parallel
- ♦ ISO-on-TCP (RFC 1006) support
- ♦ Intuitive visual flow-based programming paradigm
- ♦ Secure HTTPS/TLS encrypted data transmissions

## Product Overview

CPS 100-M, an edge IoT gateway, is fully integrated with Modbus TCP/RTU accessibility, OPC UA and IoT studio for extremely easy deployment of both centralized/decentralized field data implementation in automation process. Equipped with fieldbus accessibility, user can not only retrieve the data for live monitoring but also extract key information for custom process, like prediction and maintenance, yield rate of production...and so on. Furthermore, IoT studio brings benefits of drag-and-drop data process, exchange field data over network securely between edge and the cloud, flexible field data store/ analytics/statistics...and so on.

CPS 100-M is a perfectly matched solution for remote field data processing in automation.

## Benefits of CPS Solution

### Seamless Integration

- ♦ Compatible with existing installation in field control network
- ♦ Industrial protocol support – Modbus TCP/RTU, OPC UA client
- ♦ Data mining – MQTT-broker, OPC UA client
- ♦ Data processing and distribution – JavaScript, JSON, XML, MQTT client, TCP, UDP, HTTP, WebSocket, E-mail

### Secure Gateway Management

- ♦ Secure boot
  - ♦ Gateway monitoring
  - ♦ Network protocol – HTTP, HTTPS, IPv4, TCP/IP, UDP
  - ♦ Wireless support\* – Wi-Fi
- \* Additional module support

### Productive Engineering

- ♦ Drag-n-drop workflow builder
- ♦ Versatile pre-defined function blocks
- ♦ Initialize-configure-read/write-close pattern

### Direct IoT Communication

- ♦ For devices with OPC UA, Modbus and fieldbus protocol support
- ♦ In parallel to the PLC over a direct communication channel
- ♦ With data semantics for easy abstraction in the cloud

## Gateway Platform Specifications

### CPU Performance

- ♦ Onboard Intel® Atom™ processor E3805 1.33 GHz

### Memory

- ♦ Built-in DDR3L 2GB system memory

### Networking Connectivity

- ♦ 2 x 10/100/1000Mbps LAN ports

### Major I/O Connectivity

- ♦ 1 x USB 3.0 (900mA)
- ♦ 1 x USB 2.0 (500mA)
- ♦ 1 x RS232/485, 2.5KV isolation protection

### Wireless Connectivity (Optional Module)

- ♦ IEEE 802.11 a/b/g/n connectivity

### Power Requirement

- ♦ 1 x 12/24VDC input, ±20% range


### Storage Device

- ♦ 1 x eMMC 16GB flash memory

### Dimensions

- ♦ 63mm (W) x 100mm (D) x 151mm (H)

## Dimension Drawing

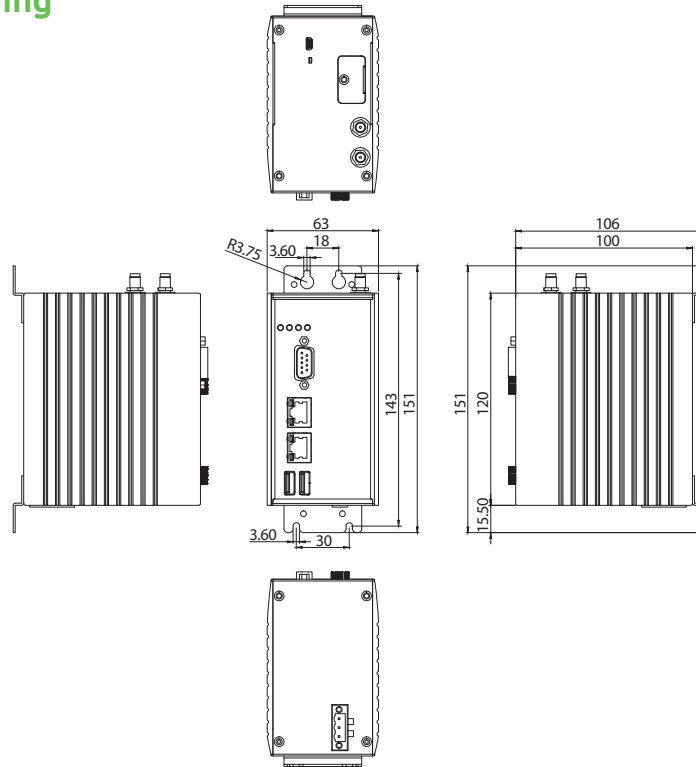

### Weight

- 600g

### Construction

- Aluminum and metal chassis with fanless design

### Shock Protection

- 50G, half sine, 11ms, IEC60068-2-27

### Vibration Protection

- Random: 2Grms @ 5~500HZ, IEC60068-2-64
- Sinusoidal: 2Grms @5~500Hz, IEC60068-2-6

### Operation Temperature

- Ambient with air flow: -20°C~65°C

### Storage Temperature

- -20°C~80°C, relative humidity: 10%~95%

### Regulation

- CE/FCC

## Ordering Information

### ◆ CPS 100-M (P/N: 10JC0010002X0)

Industrial IoT remote gateway, E3805, 2GB RAM, 16GB eMMC, Modbus TCP/RTU