

Barcode Positioning System BE 90 - SSI

TR-VBE-TI-GB-0010
06/12 Revision 01
010204-01009999-9999



- + SSI-Interface
- + Easy Installation and Commissioning
- + Measurement of Linear and Non-Linear Movements (Curved Systems)
- + Non Contact Position Measurement
- + Position Detection Up To 10 000 m
- + Programmable (BE-90 Configuration Tool)

Characteristics / Environmental conditions

| | |
|-------------------------------|---|
| Operating voltage | 10 ... 30 V |
| Power consumption | 3,2 W |
| Light source..... | Laser diode 650 nm |
| Scanning rate | 1000 scans/sec. |
| Reproducible accuracy..... | ±1 (2) mm |
| Integration time | 16 (8) ms |
| Measurement value output..... | 500 values/sec. |
| Scanning depth | 90 ... 170 mm |
| Interface type | SSI (RS422), electrically isolated 16 ... 32 data bits 800 kHz max. clock frequency output of positive and negative position values binary or Gray encoded |
| Service Interface..... | RS232 with fixed data format, 9600 baud, 8 data bits, no parity, 1 stop bit |
| Ports..... | 1 switching output, 1 switching input |
| Programming via RS232..... | PC IBM compatible (BE-90 Configuration Tool) |
| LED green..... | device ready (Power On) |
| Housing..... | diecast aluminium |
| Weight | 400 g |

Environmental conditions:

| | |
|---------------------------------------|--|
| Operation without optics heating..... | 0°C ... +40°C |
| Operation with optics heating..... | -30°C ... +40°C |
| Storage..... | -20°C ... +60°C |
| Air humidity | max. 90% rel. humidity, non-condensing |
| Vibration | IEC 68.2.6, IEC 68.2.27 (shock), IEC 801 |
| Electromagnetic compatibility | acc. to IEC 60947-5-2 |
| Protection class | IP 65 |

²⁾ valid with screwed on mating connector and / or screwed together cable gland

Subject to change

Barcode Band / Operating Principle

| | |
|--|---|
| Max. length (measurement length) | 10 000 m |
| Manufacturing method | Photo composition |
| Surface protection | Polyester, faint |
| Basic material..... | Polyester film 0,08 mm |
| Adhesive description HU | Acrylate adhesive |
| - Thickness | 0,10 mm |
| - Temperature resistance | -40°C ... +120°C, for a short time up to +160°C |

High adhesive-effect-values on low-and high-energetic surfaces with an optimized temperature resistance create permanent connections to all smooth to easily rough undergrounds.

Surface protection:

Extremely resistantly, since the bar code is protected by the polyester film.

Characteristics:

Single-edged white pigmented thin polyester film with high resistance and measure precision. Resistantly against UV-light, chemicals and solvents (restricted), scratch and wipe, humidity.

By structure of single component, low lateral attack region.

Attention!

The specifications to the barcode band, contained here, are based on test results. This does not exclude that each user must check the suitability of the product for the use planned by him himself.


Operating principle:

The BE-90 uses visible red laser light to determine its position relative to the barcode band. This essentially takes place in the following steps:

1. Reading a code on the barcode band
2. Determining the position of the read code in the scanning area of the laser beam
3. Calculating of the position to within a millimetre using the code information and the code position
4. Position output via the standardised SSI interface (synchronous serial interface)

Dimension drawing

(For project planning please request customized dimensional drawing!)

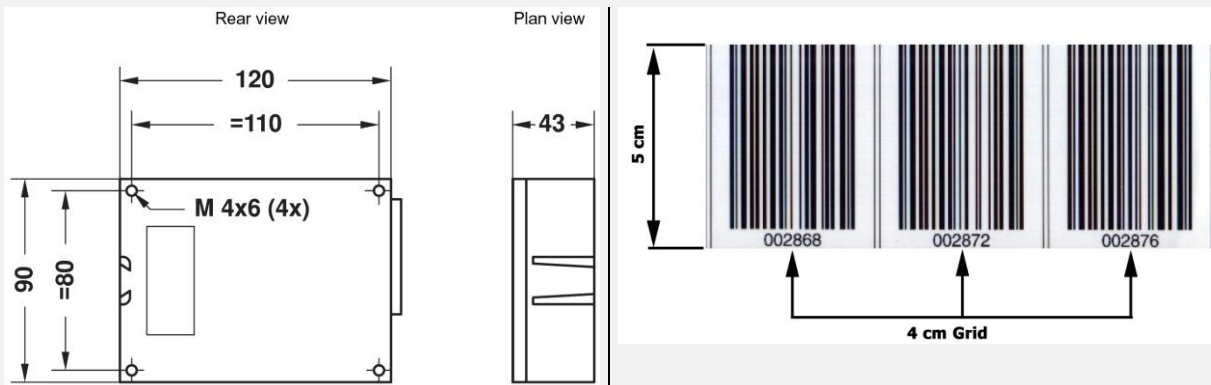

SARLIN
SARLIN OY AB • PL 750, 00101 Helsinki
Käyntiosoite: Kalvokselantie 3-5, 01610 Vantaa
Vaihde 010 550 4000 • Fax 010 550 4201
info@sarlin.com • www.sarlin.com